

Qingdian Shu

qingdian.shu@wetsus.nl

Motivation

Global warming is one of the most critical global challenges. Increasing atmospheric CO₂ concentration brought by anthropogenic emission is the major reason for this climate change problem. Capturing CO₂ from emission points and even directly from air provides a feasible solution to mitigate the amount of CO₂ emission and reduce the atmospheric CO₂ concentration. At Wetsus, under the theme Sustainable Carbon Cycle, we aim to develop novel CO₂ capture technologies that could be potentially energy efficient and environmentally benign¹.

Technological challenge

CO₂ can be captured by alkaline aqueous sorbent due to the high solubility of CO₂ under high pH. However, the conventional regeneration of the sorbent by calcination consumes a large amount of energy. Therefore, we aim to develop an alternative process for regenerating the alkaline solution in wet scrubbing process for direct air capture (DAC) application.

This alternative process is designed to create a pH-swing of the solution. We have noticed that the solubility of CO₂ in aqueous solvent is dependent on the pH of the solution (Figure 1). Thus, CO₂ can be desorbed at low pH and the sorbent can be regenerated at high pH. The configuration of the system is shown in Figure 2.

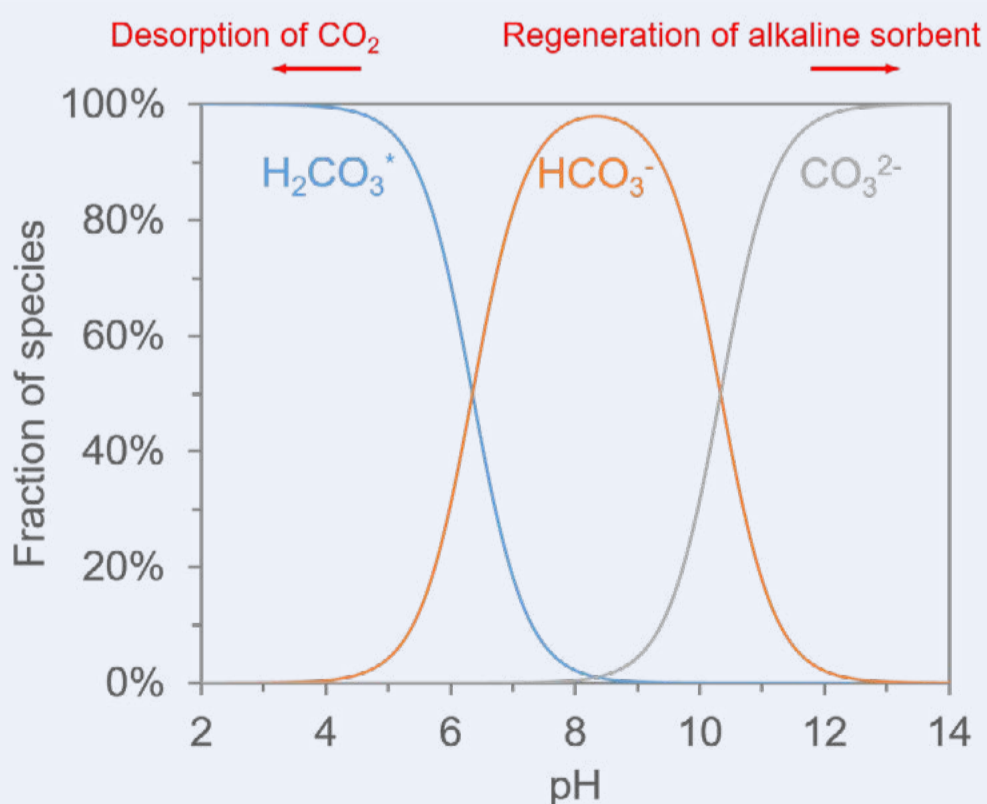


Fig 1. The fractions of different aqueous carbon species at different pH.

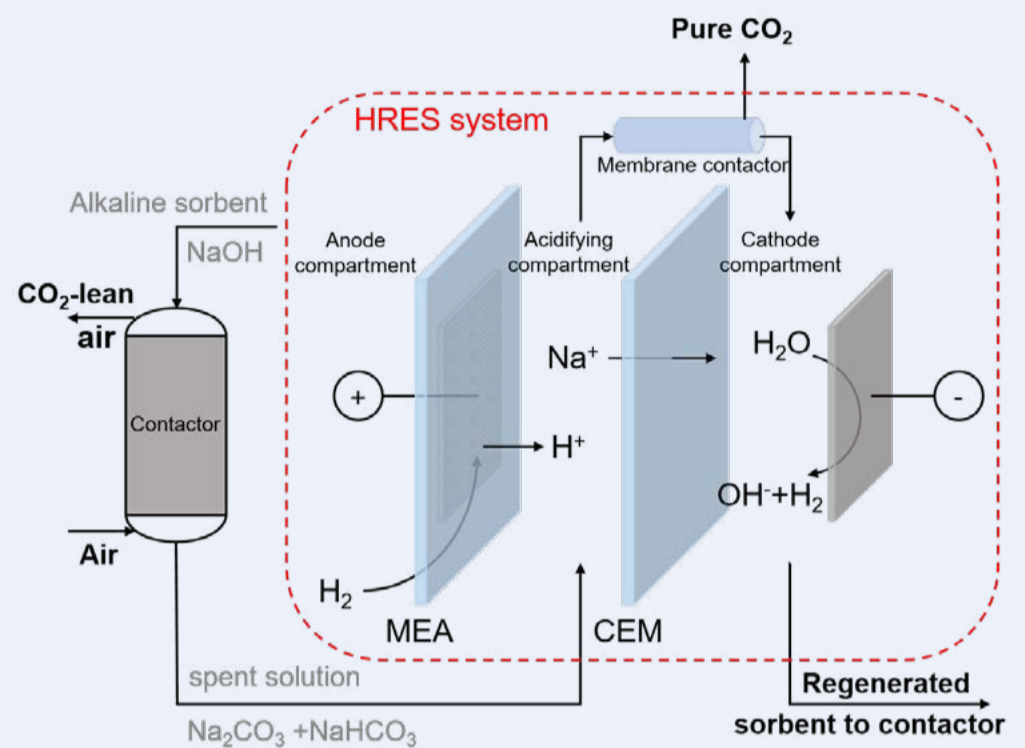


Fig 2. Principle of DAC process using a H₂-recycling electrochemical system (HRES) for CO₂ desorption and regeneration of alkaline sorbent.

The process is based on a H₂-recycling electrochemical system (HRES) which was originally developed for nitrogen recovery from wastewater². Alkaline and acidic conditions are created in two adjacent compartments respectively in HRES, so simultaneous desorption of CO₂ and regeneration of alkaline sorbent could be achieved after the spent solution flows through the electrochemical cell³.

Research goals

- Developing a novel electrochemical system for CO₂ capture based on the scheme shown in Figure 2
- Investigating the CO₂ capture performance and energy consumption of the system under different conditions
- Studying the performance of the system with different sorbents
- Developing a mathematical model of the system describing the kinetics and transport of different components
- Scaling-up study by integrating pairs of bipolar membranes in the electrochemical cell

[1] Legrand et al., Solvent-Free CO₂ Capture Using Membrane Capacitive Deionization. *Environmental science & technology* **2018**, 52, (16), 9478-9485.

[2] Kuntke et al., Hydrogen Gas Recycling for Energy Efficient Ammonia Recovery in Electrochemical Systems. *Environmental Science & Technology* **2017**, 51 (5), 3110-3116.

[3] Hamelers et al, Electrochemical device, system and method for electrochemical recovery and/or regeneration of carbon dioxide from a stream, NL2025044